
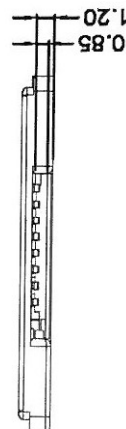
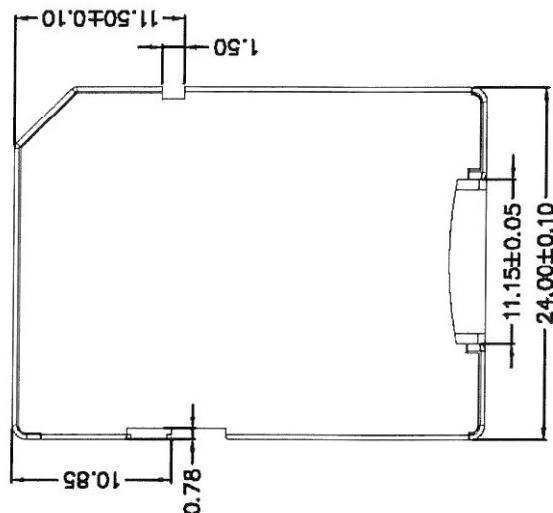

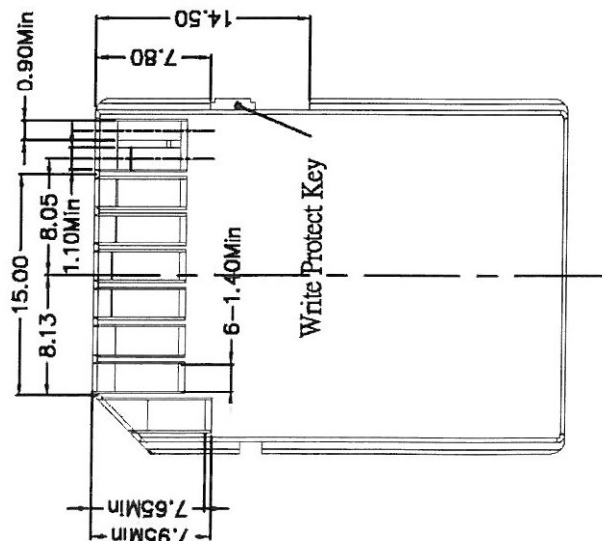
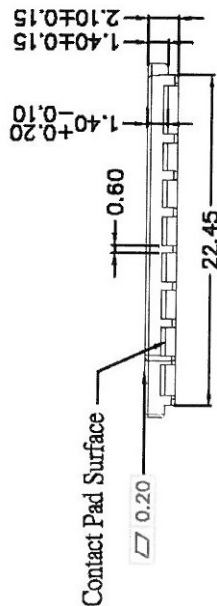


sulator:ABS+PC.
 Terminal:Phosphor Bronze C5210-EH.
 WATING :Judeplate:50 μ Nickel.
 Contact Area: Au.
 STIC:Operation Voltage 250 VAC max.
 Current Rating: 0.50 Amps max.
 Contact Resistance :100 mQ max.
 Insulation Resistance : 1000 MQ min /500 VDC.
 Dielectric Withstanding Voltage :500 VAC/minute.
 Operating Temperature : -25 $^{\circ}$ C to +85 $^{\circ}$ C.



SERIES:		ADAPTER	
TITLE:		Micro SD to SD Adapter	
LINEAR: X 44.30 X0440.20 X0040.10	APPROVALS	DATE	
ANGLES: ±3° 	DRAWN: ALEX	2007/05/10	
	CHECKED: Eric	2007/05/10	
	APPROVED: James	2007/05/10	
SIZE: A4		VERSION: A	Part No. ADSU-SDSK-G-N
SCALE: 1:1		UNIT: mm	SHEET: 1 OF 2

REV.	DESCRIPTIONS	DATE
------	--------------	------